


5V-CRIMP TECHNICAL SHEET

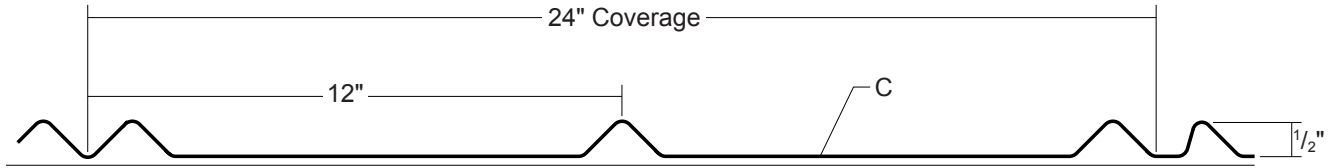

ARCHITECTURAL
RESIDENTIAL
PANEL

DIRECT
FASTEN


24"
COVERAGE

MINIMUM
SLOPE
3:12

SOLID WOOD
SUBSTRATE

PANEL OVERVIEW

- ▶ Finishes: Painted and Acrylic Coated Galvalume®
- ▶ Gauges: 26ga standard, 24ga optional
- ▶ 24" panel coverage, 1/2" rib height
- ▶ Exposed fastened panel, traditional "V" rib
- ▶ Applies over plywood substrate with 30 pound felt underlayment
- ▶ 3:12 slope minimum

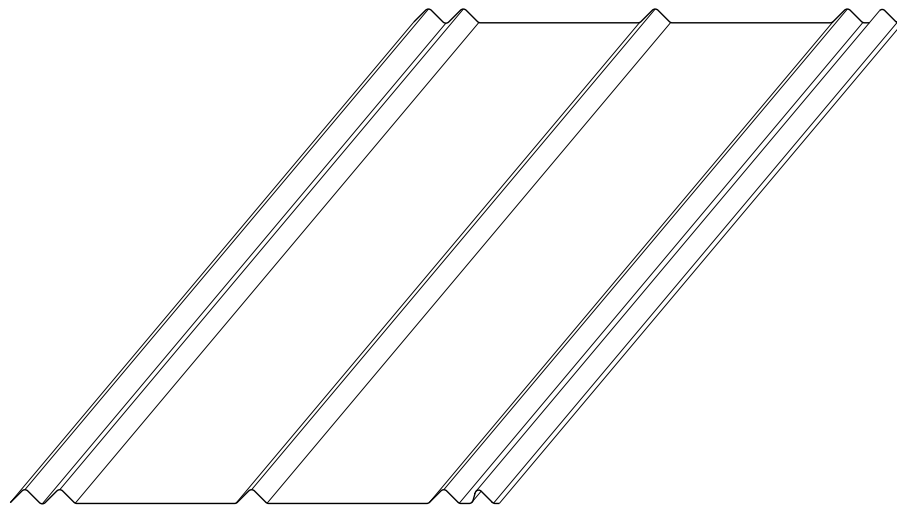


TESTING

- ▶ UL 2218, Class 4 Impact Rating
- ▶ UL 790, Class A Fire Resistance Rating
- ▶ Florida Building Code Approved 9107.1, 8131.1, 10916.2
- ▶ Miami-Dade County Approved 08-0229.13
- ▶ UL 580, Class 90 Wind Uplift Construction #579 over 1/2" Plywood
- ▶ UL 580, Class 90 Wind Uplift Construction #453 over 5/8" Plywood
- ▶ Texas Windstorm Evaluation R-160


5V-CRIMP TECHNICAL SHEET

ATTACHMENT DETAIL

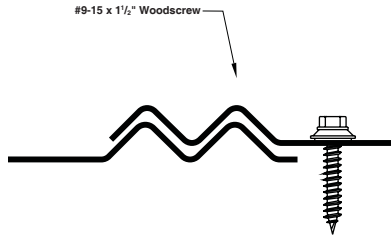


FASTENING PATTERNS

IN THE FIELD:

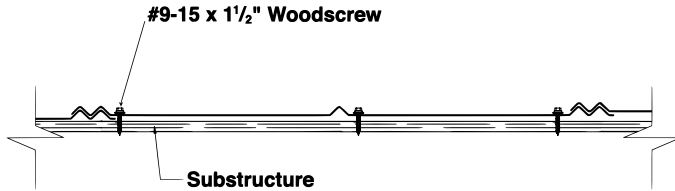

AT THE EAVE:

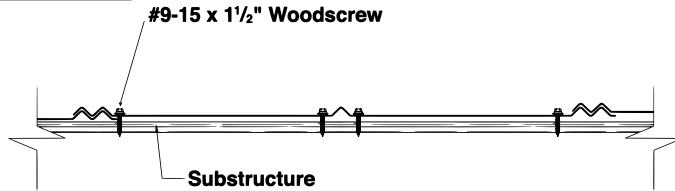

*Fastening Patterns may differ for Florida and Miami-Dade County testing.

GENERAL INFORMATION

The minimum recommended slope for 5V-Crimp roofing panel is 3:12.

► Substructure

The recommended substrate is $\frac{5}{8}$ " plywood with a 30 pound felt moisture barrier. To avoid panel distortion use a properly aligned and uniform substructure.

NOTE: 5V-Crimp roof panels are not recommended for use over open structural framing.

► Coverage

5V-Crimp panels are available in a $\frac{1}{2}$ " rib height with a coverage width of 24".

► Length

Minimum factory cut length is 4'-0". Maximum recommended panel length is 45'-0". Longer panels require additional consideration in packaging, shipping, and erection. Please consult your representative for recommendations.

► Fasteners

The fastener selection guide should be consulted for choosing the proper fastener for specific applications. Quantity and type of fastener must meet necessary loading and code requirements.

NOTE: All panels are subject to surface distortion due to improperly applied fasteners. Overdriven fasteners will cause stress and induce oil canning across the face of the panel at or near the point of attachment.

► Availability

*Finishes: Acrylic Coated Galvalume® and Painted
Gauges: 29ga, 26ga, and 24ga*

SECTION PROPERTIES

ALLOWABLE UNIFORM LOADS PSF (3 or More Equal Spans)

Ga.	Width (in.)	Yield KSI	Weight PSF	Top in Compression		Bottom in Compression		Outward Uplift Load					
				I _{xx} In ⁴ /ft	S _{xx} In ³ /ft	I _{xx} In ⁴ /ft	S _{xx} In ³ /ft	0'-6"	1'-0"	1'-6"	2'-0"	2'-6"	3'-0"
26	24"	50	0.77	0.0025	0.0069	0.0015	0.0054	101	89	60	34	22	15
24	24"	50	1.02	0.0030	0.0089	0.0020	0.0073	101	89	60	34	22	15

- Theoretical section properties have been calculated per AISI 2001. "Specifications for the Design of Cold-formed Steel Structural Members." I_{xx} and S_{xx} are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2001 specifications considering bending, shear, combined bending and shear and deflection. Allowable load considers both 3 or more equal span conditions. Allowable load does not address web crippling or fasteners/support connection. Panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase in uplift.